



- Unit, 10 and 16KW
- no Blygold or Glycol required
- 32A Isolator
- RED Cylinder, from 200 to 600L
- Pumped header 1-6 zones
- Controller
- 3 x 13A Fused Spur
- Robokit
- Delivery
- Install Manual



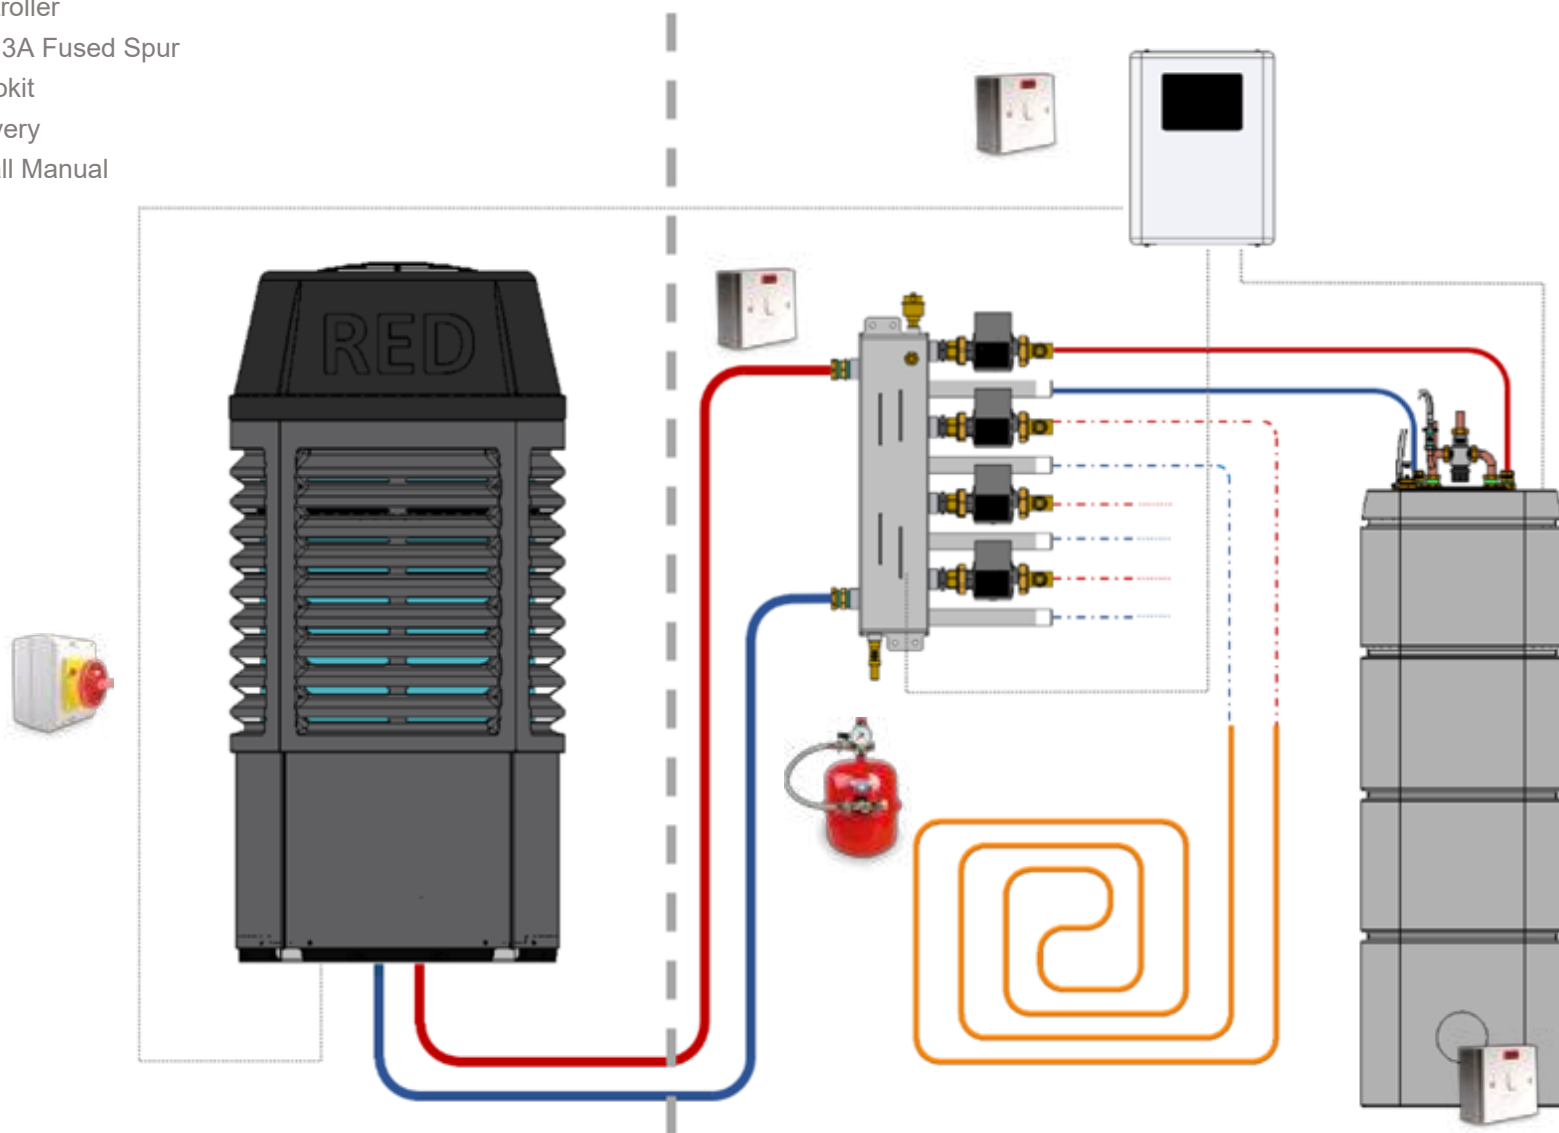

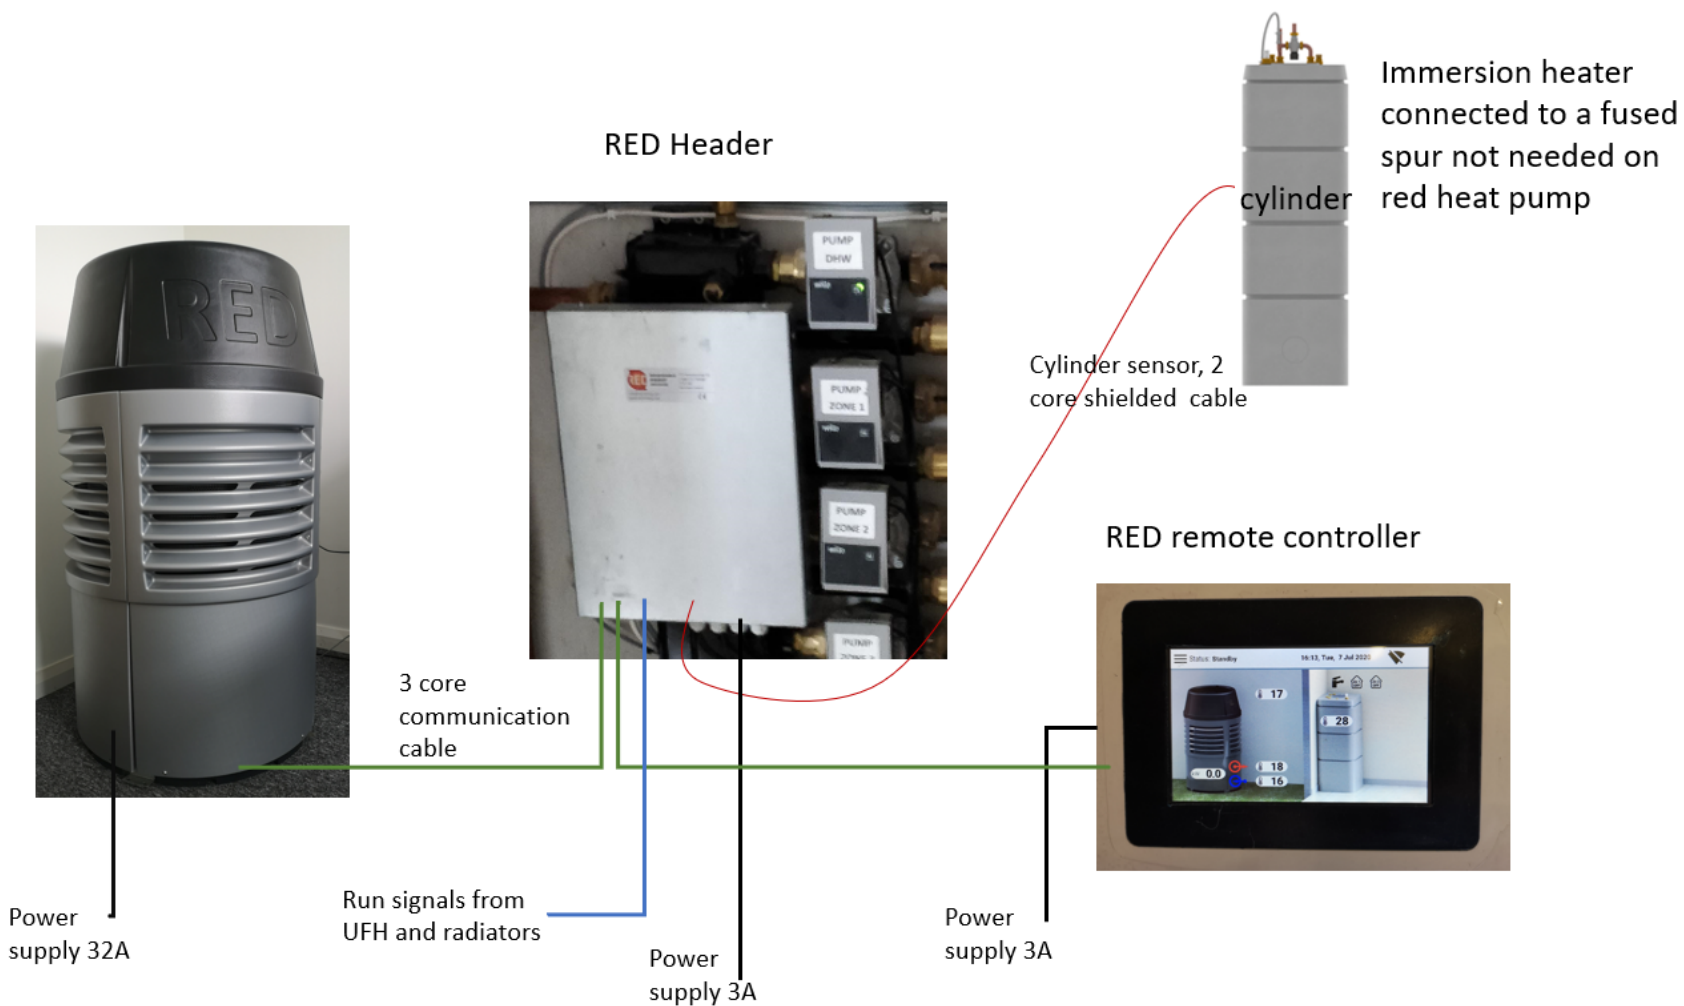

### The units:

- Monobloc units available in 10 and 16kW output single and three phase.
- 65 degree Flow temperature

### Standard Features:

- No glycol is to be used, fully integrated freeze up prevention.
- Built to work in coastal locations with no extra treatment required.
- No anti vibration feet required.
- No flexible hoses required.
- Filter, flow meter and pump built in the unit.
- Pumped low loss header in 2,3,4, 5 and 6 zone options available.
- Underfloor heating pumps included in the system.
- Comfort Cooling function available for screeded underfloor heating with no condensation.